



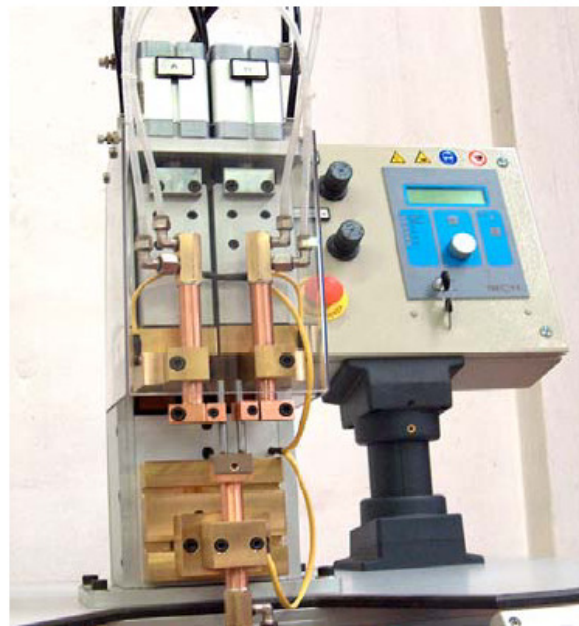

Bench dual spot welders DPT series

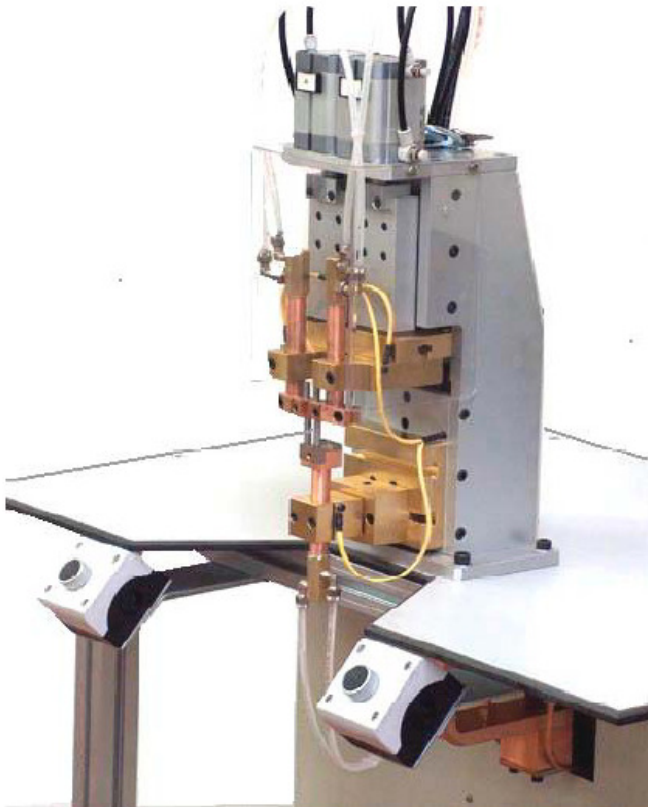

Double spot welder with independent electrodes: possibility to weld in sequence with an only transformer, but with distinguished control on each of the 2 electrodes or simultaneously with two generators.

It's ideal for windings and details where 2 weldings spots are required. TRE-CI - here you can find double

TECHNICAL DATA

It may change without forewarning

POWER	8/13/22/38/45 KVA
PNEUMATIC FORCE	40/110/180 DaN
ELECTRODE HOLDER DIAMETER	16 / 20 mm
GAP	30/45/45 mm
THROAT DEPTH	110 / 150 mm
TABLE DIMENSIONS	1000x650xh850 mm
DISTANCE BETWEEN ELECTRODES	da 6 a 40 mm
MODELS	DPT2 - DPT3 - DPT4